



COMFORTBALANCE

PFEIFER DRAKO

Description:

Pressure-extruded, low carbon, electrically welded proof coil chain; 140°F flame-retardant polyvinyl chloride that resists oxidation, weathering, solvents and chemicals


Operative Range:

Temperature Range: 5° F to 140° F

Rated Speed: Up to 600 ft./min

Installation Material: 3 U-bolts, 1 S-Hook, 1 stainless steel grip

Dampening Device: Roller DR-L or DR-H

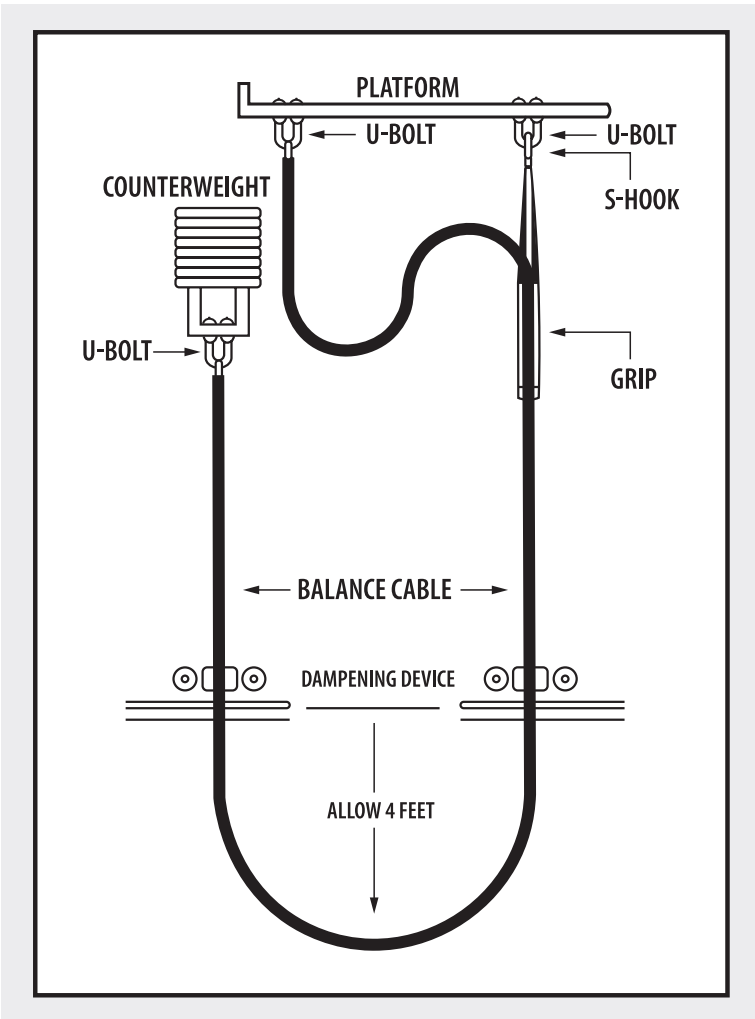

Part No.	Unit Weight (lbs.)	Chain Diameter (in.)	External Diameter (in.)	Max Hanging Length (ft.)	Min. Curve Diameter (in.)
CB 110	.75	.22	.95	360	22.0
CB 150	1.0	.25	1.14	555	23.5
CB 220	1.5	.31	1.38	590	23.5
CB 300	2.0	.35	1.50	600	25.5
CB 370	2.5	.41	1.65	600	25.5
CB 450	3.0	.45	1.73	600	25.5
CB 520	3.5	.50	1.93	600	27.0
CB 600	4.0	.53	2.05	600	27.0