


FISHPLATES



A total selection of fishplates available to match every rail application. Machined surface and perfect bore hole alignment speeds installation.

- » **Regular** (*non-seismic*)
- » **FSMs "Full Section Modulus" T-Section** (*seismic*)
- » **Triple Thick** (*drilled, tapped, counterbored plates and seismic*)

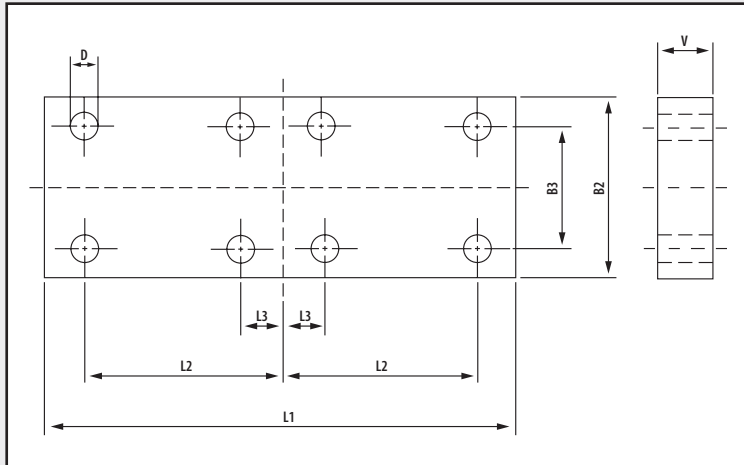

Rail	Type	AFD Part #	L1	B2	V	L3	L2	B3	D
T161 - 8LB (T89-B)	Regular	T161FPSV	12	3.5	0.59	1.5	4.5	2.25	0.5625
	T-Section	T161FSMSV	12	3.5	2.441	1.5	4.5	2.25	0.5625
	XXH Threaded	T161FPX3	12	3.5	1.687	1.5	4.5	2.25	0.5625
T709 - 12LB (T127-1/B)	Regular	T160FPSV	12	5.0	0.79	1.5	4.5	3.125	0.6875
	T-Section	T160FSMSV	12	5.0	3.504	1.5	4.5	3.125	0.6875
T160 - 15LB (T127-2/B)	XXH Threaded	T160FPX3	12	5.0	2.255	1.5	4.5	3.125	0.6875
T171 - 18.5LB (T140-1/B)	Regular	T171 / T169FPSV	14.5	5.5	0.98	1.25	6	3.625	0.8125
	T-Section	T171FSMSV	14.5	5.5	4.252	1.25	6	3.625	0.8125
	XXH Threaded	T171FPX3	14.5	5.5	2.763	1.25	6	3.625	0.8125
T169 22.5LB (T140-2/B)	Regular	T171 / T169FPSV	14.5	5.5	0.98	1.25	6	3.625	0.8125
	T-Section	T169FSMSV	14.5	5.5	4.016	1.25	6	3.625	0.8125
	XXH Threaded	T169FPX3	14.5	5.5	2.889	1.25	6	3.625	0.8125
T162 30LB (T140-3/B)	Regular	T171 / T169FPSV	14.5	5.5	0.98	1.25	6	3.625	0.8125
	T-Section	T162FSMSV	14.5	5.5	5.000	1.25	6	3.625	0.8125
	XXH Threaded	T162FPX3	14.5	5.5	3.741	1.25	6	3.625	0.8125